


# TECHNICAL DATA SHEET

## -PEDESTAL STAR.T-

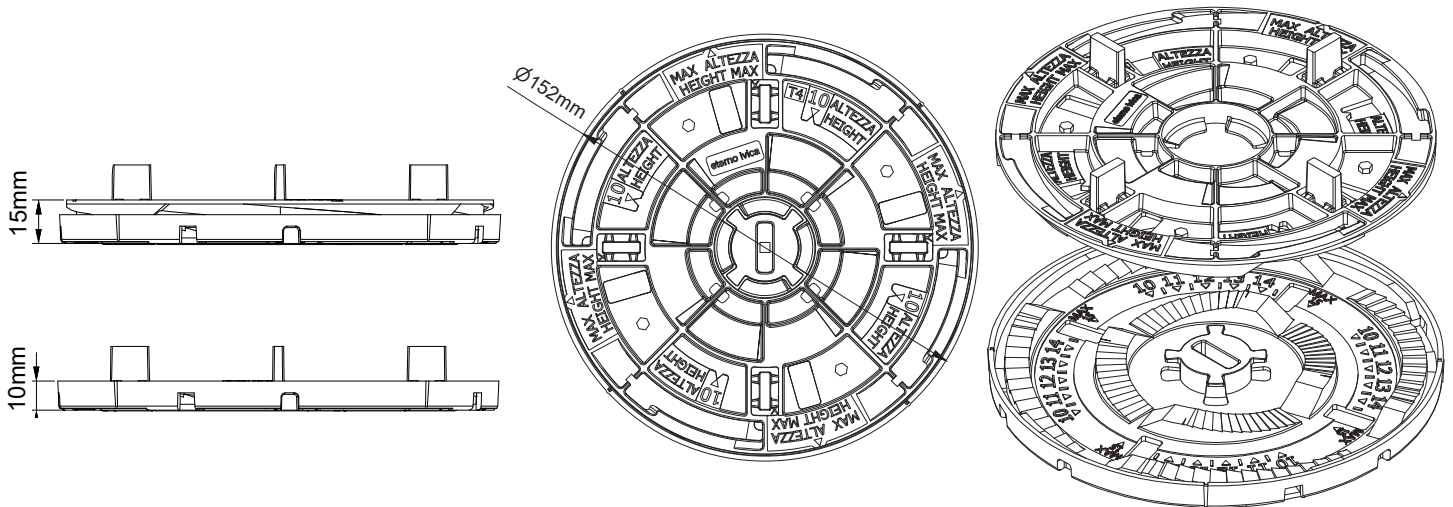

### TECHNICAL SPECIFICATION

Supply and installation of supports for raised floors "STAR.T".

The supports consist of two polypropylene elements with a diameter of 152mm and with an adjustable height from 10mm to 15mm, in the upper part there are N°4 spacer wings h 12mm with a thickness of 2-3-4mm.

In the base there are holes for the outflow of water. There are housings for various accessories and a hole for the adjustment key.

By using the special STAR.T extension, it is possible to reach a maximum height of 30mm.

### CHARACTERISTICS:

- Minimum height 8mm with only upper body used
- Minimum height with also using the base 10mm
- Height adjustable up to 15mm
- Prepared for use with extensions having a height of 5mm
- Holes for water drainage
- Hole for inserting adjustment wrench
- N°4 spacer flaps height 12mm thickness 2-3-4mm
- fracturable and removable

### RAW MATERIAL:

Polypropylene

### ENVIRONMENTAL IMPACT:

recyclable material - not dangerous

### APPLICATIONS SURFACES:

- On any waterproofing membrane
- On any insulating hard panel
- On any compact and solid surface

### APPLICATIONS AREA:

Usable with any prefabricated self sustaining element for outdoor flooring, with minimum thickness of 15mm

### GENERAL CHARACTERISTICS & PROPERTIES

	UNIT	VALUE	TOLERANCE +/-
<b>BASE DIAMETER</b>	mm	152	+/- 1.0
<b>BASE THICKNESS</b>	mm	2	+/- 0.2
<b>SURFACE OF THE BASE</b>	cmq	182	+/- 5
<b>TABS THICKNESS</b>	mm	2-3-4	+/- 0.2
<b>TABS HIGHNESS</b>	mm	12	+/- 0.2
<b>SHORE</b>	Shore d	70	+/- 3



# TECHNICAL DATA SHEET

## -PEDESTAL STAR.T-



### PARTICULAR CHARACTERISTICS & PROPERTIES

<b>STAR.T_E003010015</b>	UNIT	VALUE	TOLERANCE
min HEIGHNESS	mm	10	+/- 1,0
MAX HEIGHNESS	mm	15	+/- 1,0
WEIGHT	kg	0.091	+/- 5 %
MAX CENTRAL COMPRESSION LOADING RESISTANCE*	kN	35.53	/

The code refers to the model with 4 mm thick fins, 2 and 3 mm fins available on request

\*Tests made by Civil and Environmental Department of University of Padova. 1 kN = 98,6 kg

The packaging of the supports consists of cardboard boxes. The final packaging of the pallets is made with the wrapping of a polyethylene film. Indoor storage, protected from precipitation, is recommended.

PACK/STORAGE	
PIECES PER KIT	20
PIECES PER BOX	100
BOXES PER PALLET	54
BOX DIMENSION	40x40x24cm
BOX WEIGHT	9.4kg
PALLET	80x120cm
PCS PER PALLET	5400

### INSTALLATION METHOD

The product is laid dry, without the need for adhesives or other types of fixings.

The above data are relevant to current production and may be changed or updated by Eterno Ivica at any time without notice. Given the many possible uses and the possible interference of external elements, we do not assume responsibility for the results. The buyer is required to establish under their own responsibility the suitability of the product for the intended use. This document is property of Eterno Ivica. All rights reserved.