Advantages of the raised

Rapid water outflow

Ecology and cleanliness

Strong weight resistance

Better sound insulation


Better sound insulation



Excellent hiding place for pipes



Significant weight reduction



Excellent absorption of expansions



Floor always leveled and inspectable



Speed of installation





No parts of this publication may be reproduced in any form without prior permission.








eternoivica









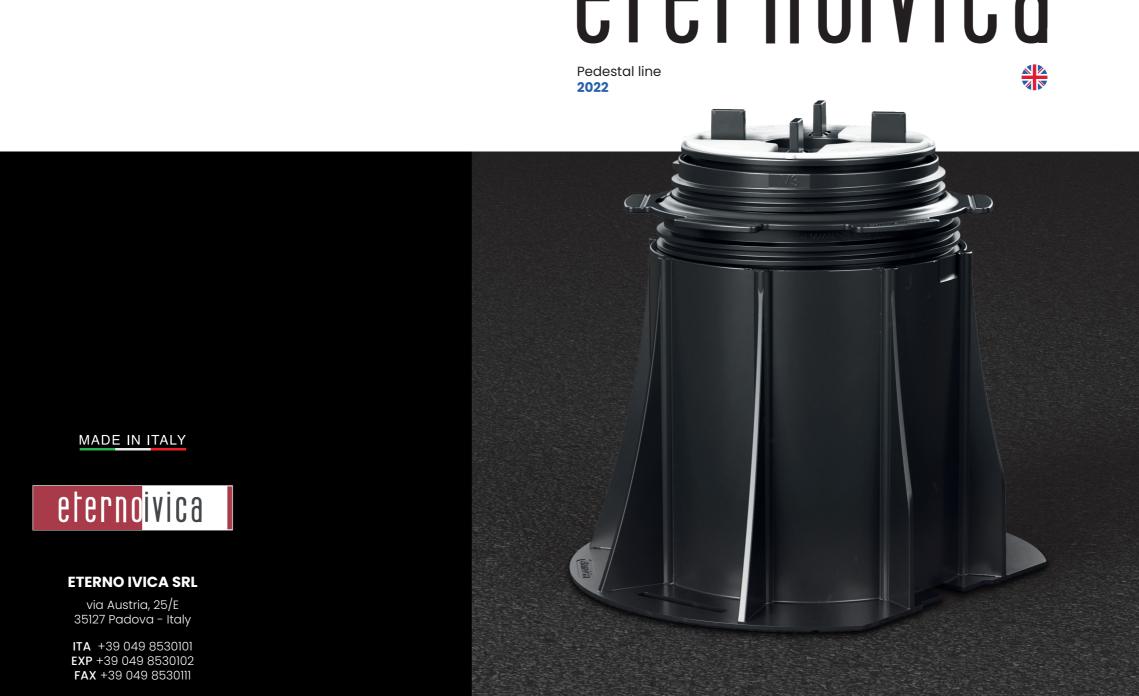



Prime® support

PR

Simple, strong and beautiful.

Three different sizes to adapt perfectly to the three bases and allow you to cover all heights from 30 mm to 420 mm.



in height with only three



or extensions are needed, or fixed product, thanks to the insertion the extension is integrated of the "head block"



PR EXTENSION


up to 945 mm



155-420 mm







- Head with top in soft non-slip and anti-noise rubber
- Tabs easy to remove
- Adjustable height from 28 to 550 mm once pavement is finished thanks to exclusive adjusting key
- 320 cm² smooth base support
- Resistant to temperatures between -40°C to 120°C
- · Resistant to weathering, acids, UV rays and wear and tear
- Suitable to any self-supporting outdoor paving system
- Entirely recyclable
- Test of tensile strength certified





New Maxi support NM

- Head with top in soft non-slip and anti-noise rubber
- Tabs easy to remove
- Precision adjustment from 25 mm
- Possibility of adjusting the height once the floor has been finished, thanks to the exclusive adjustment key
- 320 cm² smooth base support
- Resistant to temperatures between -40°C to 120°C
- Resistant to weathering, acids, UV rays and wear and tear
- Suitable to any self-supporting outdoor paving system
- Entirely recyclable
- Test of tensile strength certified







40-70 mm





60-100 mm





150-270 mm


90-160 mm






+ 2 PNM

Star.T support







The lower adjustable support in the world!

- High Technicality
- Easily removable tabs
- Possibility of raising 5 mm by adding one Extension Star.T
- Accurate adjustment from 10 to 30 mm with the adjustment key
- Utilization of Twist slope compensator TW 150




EH Rubber 10+6

EH RUBBER 10+6 is a support made of SBS recyclable rubber. If subjected to great crush performance it returns to its original shape. It has a high sound absorbing property.

EH RUBBER 10 is a fixed support 10 mm high. EH RUBBER 6 instead is a fixed support 6 mm high. Both can be used separately or superimposed.





EH RUBBER 6

EH RUBBER 10
















+ 1 PNM + 2 PNM



